


4SC8-160

Caudal máximo 16,2 m³/h. Altura máx. 164 m. Impulsión 2" Centrífuga 5 CV

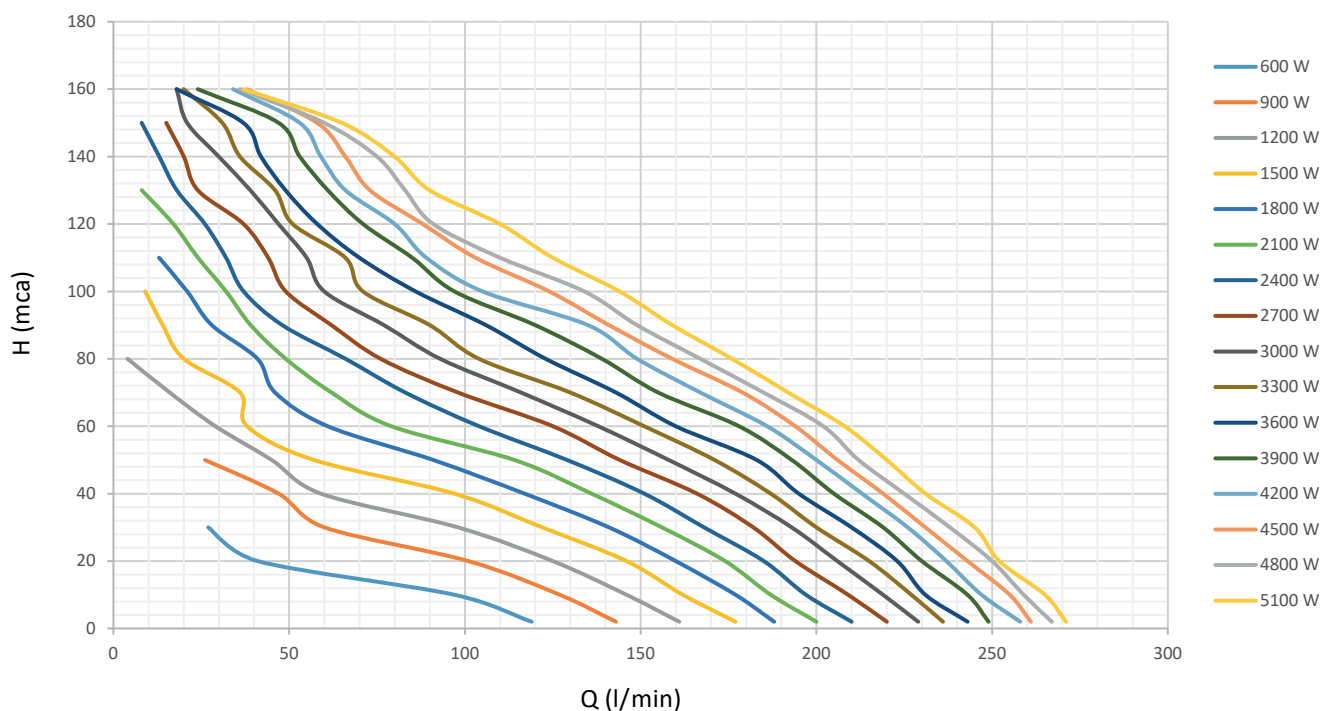

Altura (m)	Potencia de entrada (W)															
	600	900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	5100
Caudal (l/min)																
2	119	143	161	177	188	200	210	220	229	236	243	249	258	261	267	271
10	97	127	146	162	177	187	197	209	219	227	231	243	247	255	259	265
20	41	101	125	146	160	174	185	194	206	215	223	230	237	243	250	252
30	27	60	98	122	141	156	168	182	193	200	210	219	226	231	238	245
40		47	59	97	117	136	151	166	177	187	195	205	213	219	225	231
50		26	45	57	91	114	129	144	158	171	183	193	200	206	212	220
60			29	38	61	79	104	125	138	151	160	178	186	194	202	208
70			16	36	46	62	83	98	116	130	143	155	167	179	185	192
80			4	20	41	49	66	76	93	104	123	139	149	159	167	176
90				14	28	39	48	62	77	90	106	120	135	141	149	159
100				9	21	32	37	49	60	71	86	97	105	124	134	144
110					13	24	32	44	55	66	70	85	89	103	110	125
120						17	26	37	47	51	58	71	80	88	91	110
130						8	18	24	39	46	49	61	66	73	83	90
140							13	20	30	36	42	53	59	66	75	80
150							8	15	21	31	37	47	53	58	60	65
160									18	20	18	24	34	38	36	37

Panel					Paneles recomendados*	
Power (W)	Vmp (V)	Voc (V)				
330	37,5	46,8			8 x 2	
450	42,1	50,5			7 x 2	
Voltaje Entrada (Vmp): 90V-380V (Voc max= 440 V)						
Ø Impulsión	Peso neto	Longitud Bomba	Ø Bomba	Máx Potencia	Caudal máx.	Altura máx.
2"	28.5 Kg	1.2 m	4"	5.1 kW	16.2 m³/h	164 m

* No superar en combinación de string el valor Voc max.